



VHF AIR BAND TRANSCEIVER

# IC-A210



## *Innovative airband that's easier to install and see in more places*

### Large, bright OLED display

A fixed mount VHF airband first! The IC-A210 has an organic light emitting diode (OLED) display. The OLED display emits light by itself and the display offers many advantages in brightness, vividness, high contrast, wide viewing angle and response time compared to a conventional display. In addition, the auto dimmer function adjusts the display for optimum brightness at day or night.



Operating information is clearly shown on the OLED display.

### Easy channel selection

It's fast and easy to select any of memory channels in the IC-A210. The "flip-flop" arrow button switches between main and stand-by channels. The dualwatch function allows you to monitor two channels simultaneously. In addition, the auto stack memory stores the last 10 channels used and allows you to recall those channels easily.

### GPS memory function

When connected to an external GPS receiver\* equipped with an airport frequency database, the frequency data such as nearby airports can be transferred and made available in the IC-A210.

\* Ask your dealer for available GPS receiver details.



Installation example

## 12V/24V DC power source

The built-in DC-DC converter accepts a 12/24V DC power source. The IC-A210 is easily installed in most airplanes or vehicles.

## Intercom functions

The IC-A210 has a built-in voice activated intercom function allowing the pilot to talk with the copilot via the headset. The IC-A210 has adjustable audio level and squelch control functions.

## Easy installation

The IC-A210 neatly fits inside the common mounting brackets used on most airplanes including Icom's IC-A200. Two types of rear-panel adapters are included, allowing for streamlined plug-in connectivity.

\* Ask your dealer for compatible panel mount radio details.

## Other features

- TSO version planned (Pending as of July 2007)
- 10 regular memory channels with a 6-character channel name
- 200 group memory channels (20 Ch × 10 banks) with a channel tag
- NOAA weather channel receive (USA version only)
- One touch access to 121.5MHz emergency frequency
- Side tone function for monitoring your voice with headset
- ANL (Automatic noise limiter) function reduces pulse type noise
- Remote control capability
- Time-out-timer
- VFO scan
- PC programming capability
- Dial lock and panel lock
- Squelch test function

## SPECIFICATIONS

### GENERAL

- Frequency coverage :
  - Tx/Rx : 118.000–136.975MHz
  - Rx WX channels : 161.650–163.275MHz\* (\* USA version only.)
- Frequency spacing : 25kHz
- Frequency stability : ±5ppm
- Operating temperature : -20°C to +55°C
- Antenna impedance : 50Ω
- No. of memory channels : 10 regular memory, 200 group memory, 10 GPS, 10 weather\*, 10 auto stack memory (\* USA version only)
- Power supply requirement : 13.8/27.5V DC (Negative ground)

- Dimensions (W×H×D) : 160×34×271 mm (Projections not included) 6<sup>2</sup>/<sub>16</sub>×1<sup>11</sup>/<sub>32</sub>×10<sup>21</sup>/<sub>32</sub> in
- Weight (approx.) : 1.0kg; 2.2lb

### TRANSMITTER

- Output power : 8W typical (Carrier power)
- Spurious emission : -60dBc
- Microphone impedance : 600Ω

### RECEIVER

- Intermediate frequencies: 1st 38.85MHz  
2nd 450kHz
- Sensitivity AM : Less than 2μV at 6dB S/N
- Selectivity : 6dB ±3kHz  
60dB ±22kHz
- Spurious rejection : More than 74dBμ
- Audio output power : 5W with a 4Ω load  
60mW with a 500Ω load

Measurements made in accordance with RTCA DO-186B for USA version. All stated specifications are and subject to change without notice or obligation.

### Supplied Accessories

- Mounting bracket kit
- Rear panel adapter

## OPTIONS

### MB-53 MOUNTING BRACKET



For mounting the IC-A210 to a vehicle. External speaker (SP-5) and microphone (HM-176) are included.


### PS-80 POWER SUPPLY



Provides convenient ground-based IC-A210 operations. Includes built-in speaker and an HM-176\* microphone. (\* Depending on version)

- Dimensions : 200(W) × 200(H) × 300(D) mm
- Output : 13.8V DC/6A

## REAR PANEL VIEW

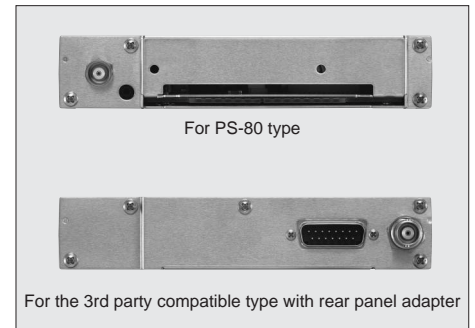

## Icom Inc.

1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

## Count on us!

### Icom America Inc.

2380 116th Avenue NE,  
Bellevue, WA 98004, U.S.A.  
Phone : +1 (425) 454-8155  
Fax : +1 (425) 454-1509  
E-mail : [sales@icomamerica.com](mailto:sales@icomamerica.com)  
URL : <http://www.icomamerica.com>

### Icom New Zealand

146A Harris Road, East Tamaki,  
Auckland, New Zealand  
Phone : +64 (09) 274 4062  
Fax : +64 (09) 274 4708  
E-mail : [inquiries@icom.co.nz](mailto:inquiries@icom.co.nz)  
URL : <http://www.icom.co.nz>

### Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay,  
Kent, CT6 8LD, U.K.  
Phone : +44 (0)1227 741741  
Fax : +44 (0)1227 741742  
E-mail : [info@icomuk.co.uk](mailto:info@icomuk.co.uk)  
URL : <http://www.icomuk.co.uk>

### Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,  
Taipei, Taiwan, R.O.C.  
Phone : +886 (02) 2559 1899  
Fax : +886 (02) 2559 1874  
E-mail : [sales@asia-icom.com](mailto:sales@asia-icom.com)  
URL : <http://www.asia-icom.com>

Your local distributor/dealer:

### Icom Canada

Glenwood Centre #150-6165 Highway 17,  
Delta, B.C., V4K 5B8, Canada  
Phone : +1 (604) 952-4266  
Fax : +1 (604) 952-0090  
E-mail : [info@icomcanada.com](mailto:info@icomcanada.com)  
URL : <http://www.icomcanada.com>

### Icom (Europe) GmbH

Communication Equipment  
Himmelgeister Str. 100,  
D-40225 Düsseldorf, Germany  
Phone : +49 (0)211 346047  
Fax : +49 (0)211 333639  
E-mail : [info@icomeurope.com](mailto:info@icomeurope.com)  
URL : <http://www.icomeurope.com>

### Icom France s.a.s.

Zac de la Plaine,  
1 Rue Brindejone des Moulinais, BP 45804,  
31505 Toulouse Cedex 5, France  
Phone : +33 (5) 61 36 03 03  
Fax : +33 (5) 61 36 03 00  
E-mail : [icom@icom-france.com](mailto:icom@icom-france.com)  
URL : <http://www.icom-france.com>

### Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,  
Clayton, VIC 3168 Australia  
Phone : +61 (03) 9549 7500  
Fax : +61 (03) 9549 7505  
E-mail : [sales@icom.net.au](mailto:sales@icom.net.au)  
URL : <http://www.icom.net.au>

### Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"  
Bajos A 08174, Sant Cugat del Valles,  
Barcelona, Spain  
Phone : +34 (93) 590 26 70  
Fax : +34 (93) 589 04 46  
E-mail : [icom@icomspain.com](mailto:icom@icomspain.com)  
URL : <http://www.icomspain.com>

### Icom Polska

81-850 Sopot, ul. 3 Maja 54, Poland  
Phone : +48 (58) 550 7135  
Fax : +48 (58) 551 0484  
E-mail : [icompolska@icompolska.com.pl](mailto:icompolska@icompolska.com.pl)  
URL : <http://www.icompolska.com.pl>